

WIDE1 LED

24V-AC/DC
100÷240V-AC

20W - 40W
6.000°K 40.000 hours

RoHS RAE CONFORMITY



IP67




EUROPEAN INDUSTRIAL COMPONENTS

wide-001

WIDE1-201C-24ACDC
WIDE1-201P-24ACDC
WIDE1-201P-100240AC



WIDE1-202C-24ACDC
WIDE1-202P-24ACDC
WIDE1-202P-100240AC

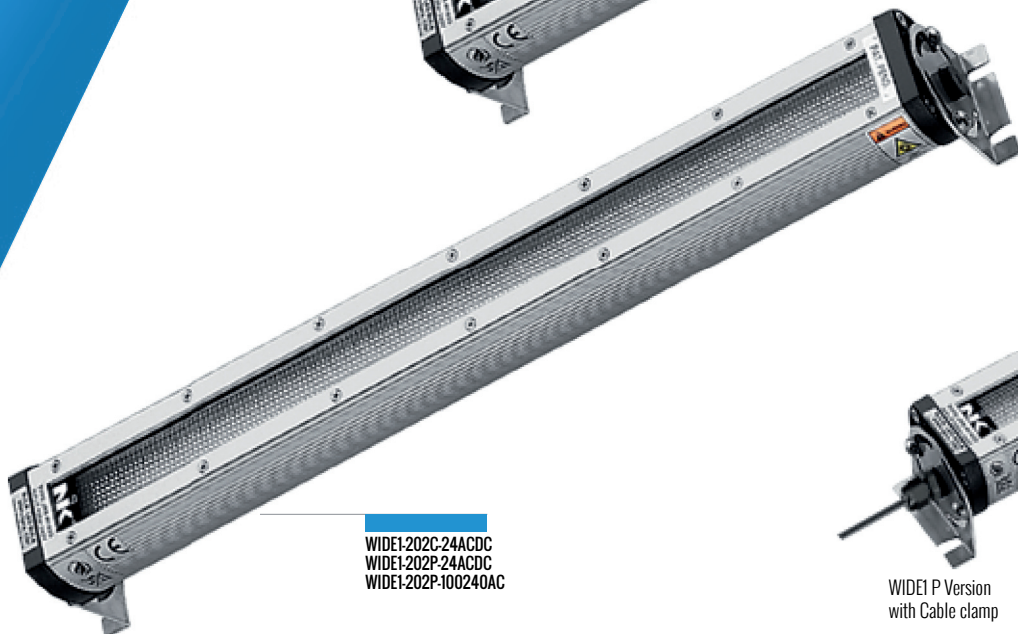

WIDE1 P Version
with Cable clamp



Straight fast connector
with cable 5mt



90° fast connector
with cable 5mt



WIDE1 C Version
with Connector

HIGH PERFORMANCES

- Up to 85% energy saving
- Low performing heat
- Zero maintenance
- Aluminium structure
- Equipped with high resistance glass and anti-dazzle grid
- Resistant to coolants and lubricants
- Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative EN 1387

WIDE1 LED IP67


24V-AC/DC
100-240V-AC

20W - 40W
6.000°K 40.000 hours


RoHS RAEE CONFORMITY



WIDE1 C 24V-AC/DC

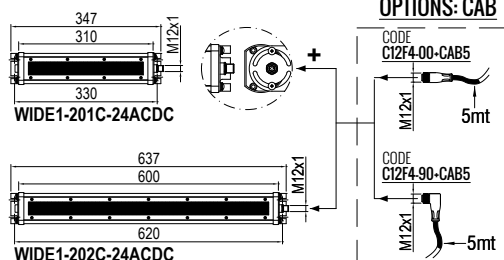

WIDE1 P 24V-AC/DC WIDE1 P 100-240V-AC

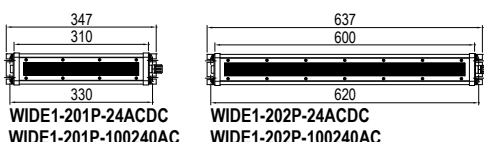

2 power and length options:

•WIDE1-201 with 1 Set of LEDs (No.48)
for a total of 20W


•WIDE1-202 with 2 Sets of LEDs
(No.96) for a total 40W

2 voltage options:

•24V-AC/DC with cabling's choice
between M12 Connector at 4-pin or
(P)Cable-clamp with 3-pole cable
•100-240V-AC with (P)Cable-clamp
and cable with Schuko plug

Standard: built-in LED driver and tilting
mounting supports

Options: straight or 90° fast connector
with cable 5mt (for lamps WIDE1 C with
Connector) and fixing brackets

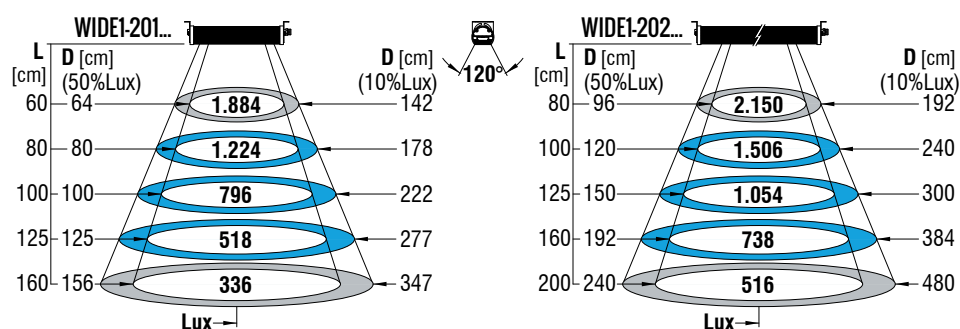


WIDE1 24V-AC/DC 20W - 40W

CODE	Vin	W	CAB. mt	Kg
WIDE1 C: Connector				
WIDE1-201C-24ACDC	24V	20W	Options	1.60
WIDE1-202C-24ACDC	AC/DC	40W		2.50
WIDE1 P: (P)Cable-clamp				
WIDE1-201P-24ACDC	24V	20W	CV 03	1.60
WIDE1-202P-24ACDC	AC/DC	40W	1.80	2.50

WIDE1 100-240V-AC 20W - 40W

CODE	Vin	W	CAB. mt	Kg
WIDE1 P: (P)Cable-clamp				
WIDE1-201P-100240AC	100-240V	20W	SP 02	1.60
WIDE1-202P-100240AC	AC	40W	1.80	2.50

OPTIONS

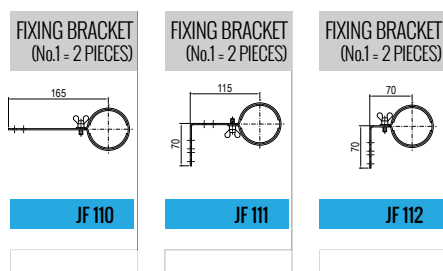

OPTIONS: CAB (WIDE1 C)

