

# MINI-Z<sup>ZOOM</sup> LED

24V-AC/DC  
100÷240V-AC

3W  
6.000°K 40.000 hours

RoHS RAEE CONFORMITY



IP65



MiniZ-001



MN03 LZ-F700-24ACDC  
MN03 LZ-F700-100240AC

## HIGH PERFORMANCES

- Up to 85% energy saving
- Low performing heat
- Zero maintenance
- Aluminium adjustable head with variable angle and high resistance glass
- Easily adjustable and vibration-resistant flexible arm
- Resistant to coolants and lubricants
- Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative EN 1387

# MINI-Z LED IP65

24V-AC/DC  
100÷240V-AC


3W  
6.000°K 40.000 hours

RoHS RAEE CONFORMITY




2 voltage options:  
 ·24V-AC/DC with LED driver built-in the base and 2-pole cable  
 ·100÷240V-AC with LED driver built-in the base and cable with 10A Euro plug  
 Optional accessories:  
 mounting clamp, angle plate and magnetic base

## MINI-Z LED 24V-AC/DC, 3W

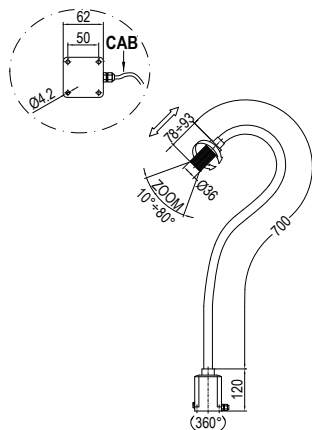


MN03 LZ-F700-24ACDC

## MINI-Z LED 100÷240V-AC, 3W

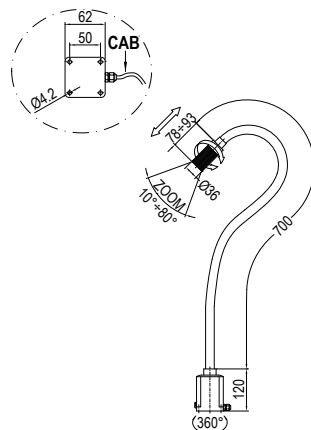

MN03 LZ-F700-100240AC

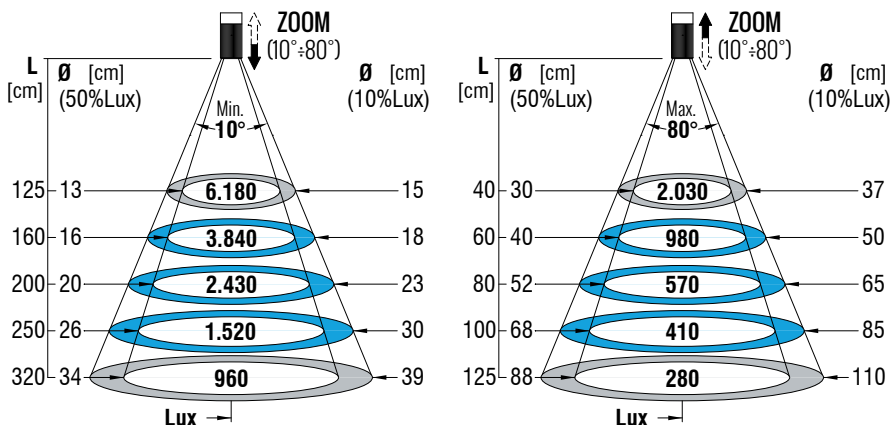

## MINI-Z LED 24V-AC/DC

STANDARD

CODE	Vin	WxLed	CAB. mt	Kg
MN03 LZ-F700-24ACDC	24V AC/DC	3Wx1	CV 02 1.80	1,10

## MINI-Z LED 100÷240V-AC

STANDARD

CODE	Vin	WxLed	CAB. mt	Kg
MN03 LZ-F700-100240AC	100÷240V AC	3Wx1	SP 04 1.80	1,10

## OPTIONS

	CLAMP	ANGLE PLATE	MAGNETIC BASE
CODE	J C03	J L05	J M01