

MINI-S SHORT LED

3V-DC
24V-AC/DC
100÷240V-AC

1W
6.000°K 40.000 hours

RoHS RAEE CONFORMITY



IP54



EUROPEAN INDUSTRIAL COMPONENTS

MiniS-001



MN01 L-F275-3DC-SB

MN01 L-F380-24ACDC
MN01 L-F380-100240AC

HIGH PERFORMANCES

- ▣ Up to 85% energy saving
- ▣ Low performing heat
- ▣ Zero maintenance
- ▣ Technopolymer adjustable head with high resistance glass
- ▣ Easily adjustable and vibration-resistant flexible arms
- ▣ Resistant to coolants and lubricants
- ▣ Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative EN 1387

MINI-S LED IP54

3V-DC
24V-AC/DC
100÷240V-AC

1W
6.000°K 40.000 hours

RoHS RAEE CONFORMITY



1 model without base:
-3V-DC/350mA with 2-pole cable
-in option: 24V-AC/DC or
100÷240V-AC external LED driver
2 voltage options with base:
-24V-AC/DC with LED driver built-in the
base and 2-pole cable
-100÷240V-AC with LED driver built-in
the base and cable with 10A Euro plug
Optional accessories (base versions):
mounting clamp, angle plate and
magnetic base

MINI-S LED 3V-DC/350mA, 1W





MN01 L-F275-3DC-SB

OPTION



$[V_{in}] \leq \rightarrow$	3V-DC
CODE	LD2-1024-P1
$[V_{in}]$	24V-AC/DC
CODE	LN-0104-P5
$[V_{in}]$	100÷240V-AC

MINI-S LED 24V-AC/DC, 1W




MN01 L-F380-24ACDC

MINI-S LED 100÷240V-AC, 1W



MN01 L-F380-100240AC

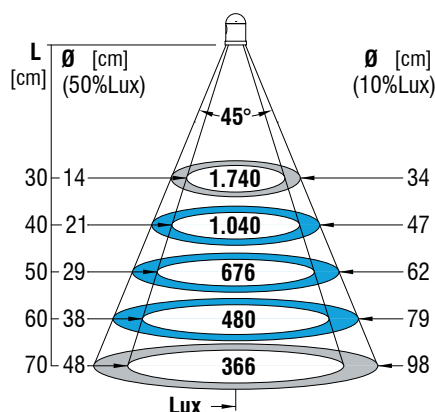

MINI-S LED 3V-DC/350mA

24V-AC/DC 100÷240V-AC

STANDARD

CODE	V _{in}	W _x Led	CAB. mt	Kg
MN01 L-F275-3DC-SB	3V-DC 350mA	1Wx1	CV 02 1,00	0,18

OPTION: External LED Driver

LD2-1024-P1	24V AC/DC			0,03
LN-0104-P5	100÷240V AC			0,04

MINI-S LED 24V-AC/DC

STANDARD

CODE	V _{in}	W _x Led	CAB. mt	Kg
MN01 L-F380-24ACDC	24V AC/DC	1Wx1	CV 02 1,80	0,43


MINI-S LED 100÷240V-AC

STANDARD

CODE	V _{in}	W _x Led	CAB. mt	Kg
MN01 L-F380-100240AC	100÷240V AC	1Wx1	SP 04 1,80	0,43

OPTIONS

CLAMP
MN01 L-F380



CODE

J C03

ANGLE PLATE
MN01 L-F380



J L05

MAGNETIC BASE
MN01 L-F380



J M01